


Bi-Di Pigs
For draining or separation

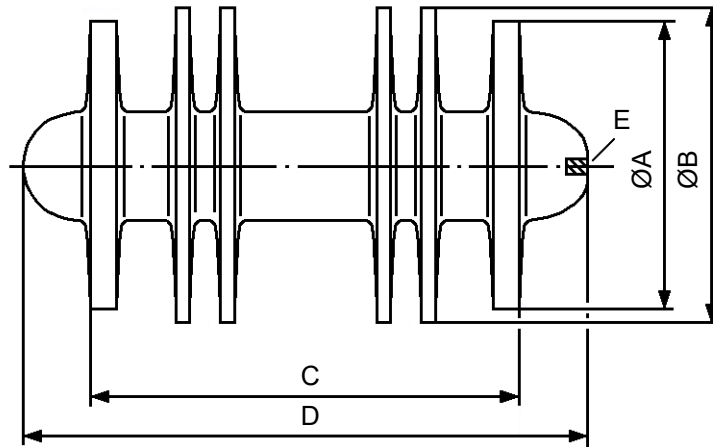

Dimensions	Ø A mm	Ø B mm	C mm	D mm	E	SHA	Kg
2"	-	54	93,5	115	M10	85	0,30
3"	-	92	93,5	115	M10	85	0,35
4"	108	114	150	200	M10	85	0,50
5"	120	145	202	290	M10	75	1,00
6"	158	168	202	290	M10	75	2,95
8"	211	219	270	-	M12	75	6,80
10"	262	273	335	-	M12	75	13,00
12"	311	324	385	-	M12	75	20,30

Specification:

- The pigs are made of solid polyurethane
- Workingtemperature max. +60°
- They pass elbows 1,5 x d
- Material are suitable for vegetable oils
- Extremely suitable for draining process pipes
- Extremely suitable by separation between different medias in process