

Flowrox™ pump LPP-D Hose pump

**LPP-D hose pump is designed for
heavy industrial duties**



LPP-D Hose pump

Description:

Flowrox™ LPP-D pumps are designed for heavy industrial duties and are ideal for dosing and flow control of abrasive, corrosive, viscous or crystallizing media. They provide accurate dosing in all process conditions as the pump discharge flow does not depend on the pipeline pressure. There is no variation due to the discharge pressure condition, output remains the same on every cycle.

Flowrox hose pumps provide exact flow per revolution. They also incorporate an advanced rolling design, which eliminates friction, maximizes hose life and lowers energy consumption.

Lifetime of Flowrox pumps' hoses is 3-5 times longer than conventional hose pumps.



Benefits

- Accurate dosing
- Capability to pump 24/7
- Energy efficiency
- Long service intervals
- Low operating costs

Features

- Accurate dosing enabled by positive displacement pumping which also minimizes back flow.
- No overheating at high continuous flow rates due to the advanced roller design that minimizes friction and heat.
- Wear resistant hose and hose inserts are the only parts in contact with the medium.
- Ideal for pumping diverse slurries and dosing a wide range of abrasive, corrosive, viscous or crystallizing media.


Ideal applications

- Chemical dosing (e.g. lime milk, Flocculants)
- Flotation
- Process analyser sample transfer


Technical data	LPP-D15 / LPP-D1/2	LPP-D20 / LPP-D3/4	LPP-D25 / LPP-D1
weight	47 kg / 104 lb	47 kg / 104 lb	60 kg / 132 lb
Flow/revolution	0,1 l / 0.026 gal	0,18 l / 0.047 gal	0,3 l / 0.079 gal
Max. flow	0,66 m ³ pr. time / 2.91 gpm	1,2 m ³ pr. time / 5.28 gpm	2,0 m ³ pr. time / 8.8 gpm
Max. pressure (standard)	7.5 bar / 108 psi	7.5 bar / 108 psi	7.5 bar / 108 psi
Max. Pressure (high pressure)	16 bar / 232 psi	16 bar / 232 psi	16 bar / 232 psi
Max. Fluid temperature	95°C / 203°F (NR-slange: 75°C / 167°F)		
Lubricant volume (standard)	0,4 l / 0.1 gal	0,4 l / 0.1 gal	0,4 l / 0.1 gal
Lubricant volume (high pressure)	1 l / 0.26 gal	1 l / 0.26 gal	1 l / 0.26 gal
Hose bore	DN 15 / 1/2"	DN 20 / 3/4"	DN 25 / 1"
Motor power	0,55-1,1 kW / 0.75 - 1.5 hp	0,55-1,1 kW / 0.75 - 1.5 hp	0,55-1,5 kW / 0.75 - 2.0 hp

Pump curves


LPP-D15 CAPACITY CHART, CONTINUOUS DUTY, UP TO 95°C / 203°F
(24 h/day / 7 days per week)

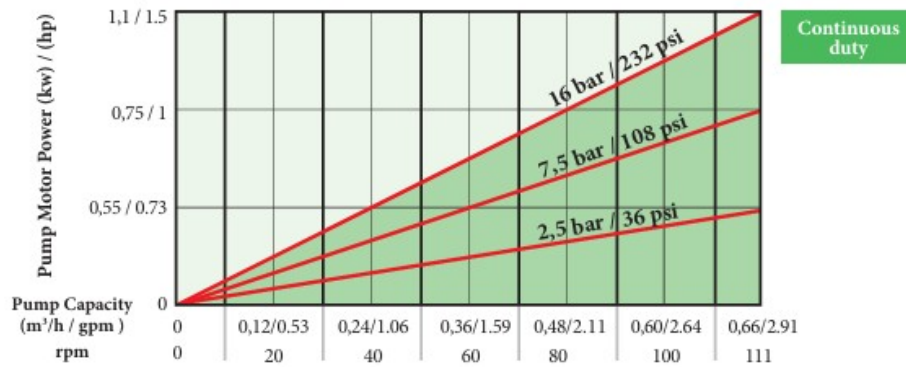


LPP-D20 CAPACITY CHART, CONTINUOUS DUTY, UP TO 95°C / 203°F
(24 h/day / 7 days per week)

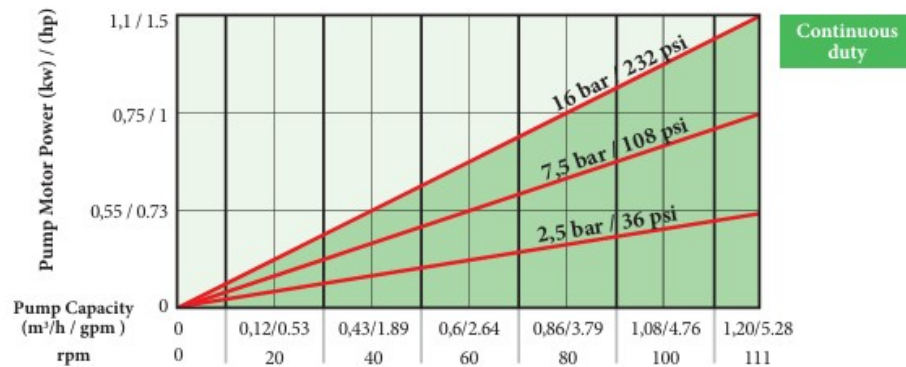

LPP-D25 CAPACITY CHART, CONTINUOUS DUTY, UP TO 95°C / 203°F
(24 h/day / 7 days per week)

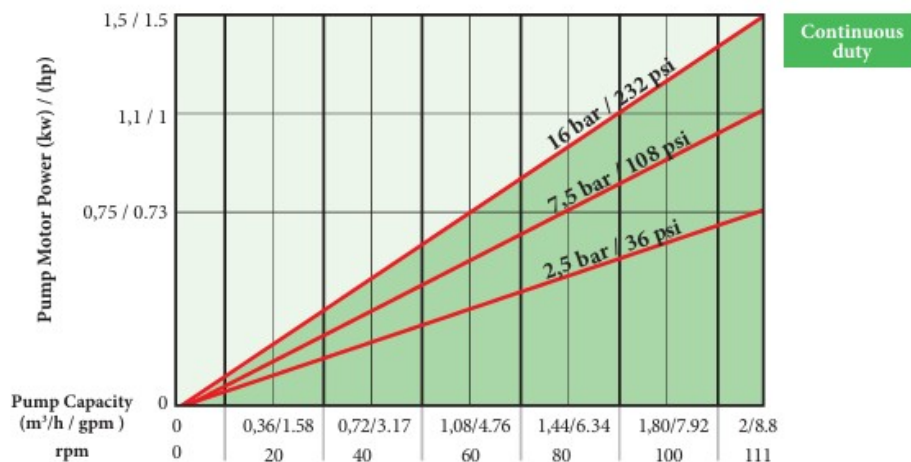


Exploded view of complete LPP-D pump

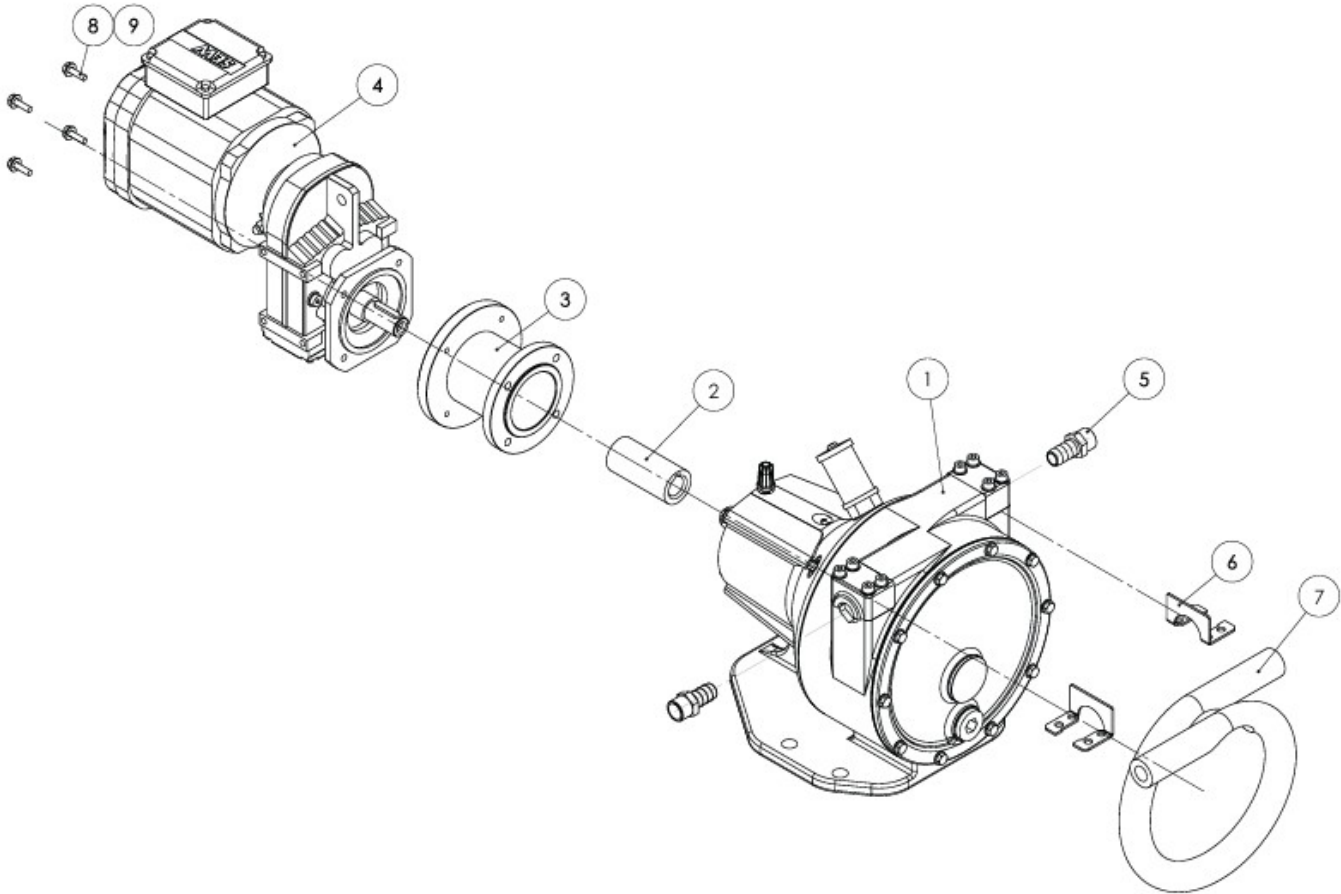

Part	Description	Qty.
1	Pump head	1
2	Coupling	1
3	Adapter flange	1
4	Gear motor	1
5	Hose insert	2
6	Sticker seal	1
7	Hose	2
8	Screw	4
9	Washer	4

All exploded parts are modular and order specific. Adapter parts vary depending on the selected gear motor.

Exploded view of LPP-D pump head

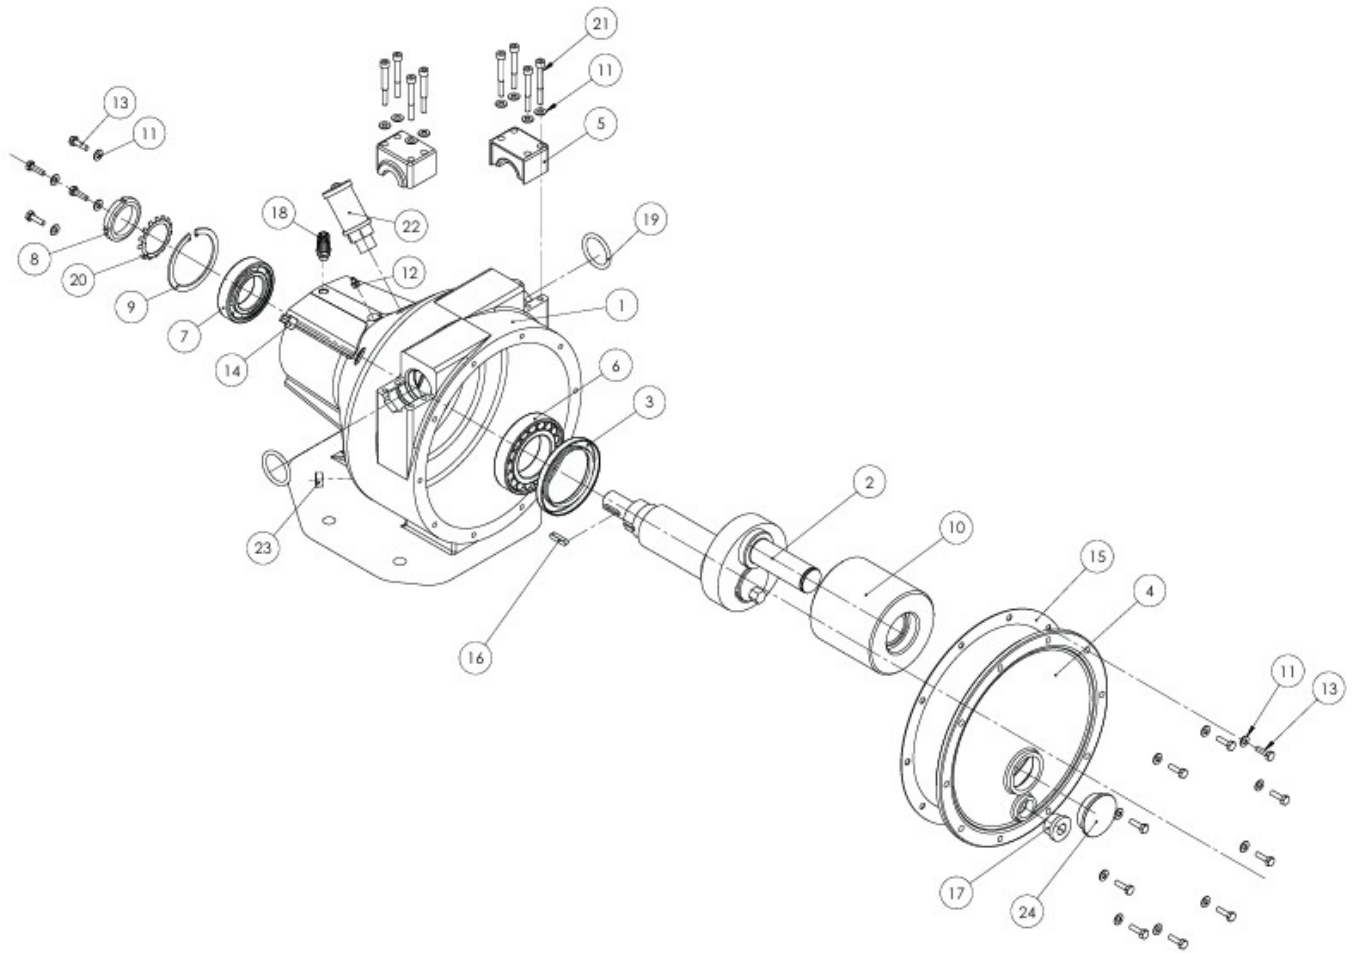

Part	Description	Qty.	Part	Description	Qty.
1	Body	1	13	Screw	14
2	Crankshaft	1	14	Plug	1
3	Radial shaft seal	1	15	Front cover seal	1
4	Front cover	1	16	Parallel key	1
5	Hose bracket	2	17	Plug	1
6	Roller bearing	1	18	Silencer	1
7	Ball bearing	1	19	O-ring	2
8	Shaft nut	1	20	Lock plate	1
9	Retaining ring	1	21	Screw	8
10	Rotor assembly	1	22	Breather	1
11	Washer	22	23	Hex socket plug	1
12	Grease nipple	1	24	Oil eye	1

Standard construction. In high pressure pumps support rollers are used in addition with rotor assembly:
LPP-D15/20: 3 support rollers
LPP-D25: 2 support rollers

Technical specifications

Sizes:

DN 15, 20, 25 / 1/2", 3/4", 1".

Connections:

G 1/2" male threads (LPP-D 15 / LPP-D 1/2")

G 3/4" male threads (LPP-D 20 / LPP-D 3/4")

G 1" male threads (LPP-D 25 / LPP-D 1")

Temperature range:

Max. fluid temperature

95°C (NR-hose: 75°C)

Minimum og maximum ambient operating temperature:

0 til 46°C

Construction materials:

Body: Cast aluminium

Rotor: Carbon steel / polyurethane

Hose insert: AISI 316 stainless steel / polypropylene /
nylon

Hose material:

EPDM = Ethylene propylene

NR = Natural rubber

NBR = Nitrile

NBRF = Nitrile (FDA)

Drive unit:

Gear motor

Gear unit

Bare shaft

Auxiliaries:

Hose leak detector

Revolution detector

Forced cooling fan

Pressure transmitter

Frequency inverter

Comparison of Flowrox technology

Flowrox rolling technology is capable of operating in continuous duty with its max. pressure and max. flow in the same point. This is where the conventional pump compromises either on pressure or flow.

Compared to Flowrox pumps, conventional hose pumps can only reach less than half of the flow in continuous duty. What is more, Flowrox pumps can perform even with high temperature media up to 95°C.

Continuous duty 24/7 at 7,5 bar / 108 psi


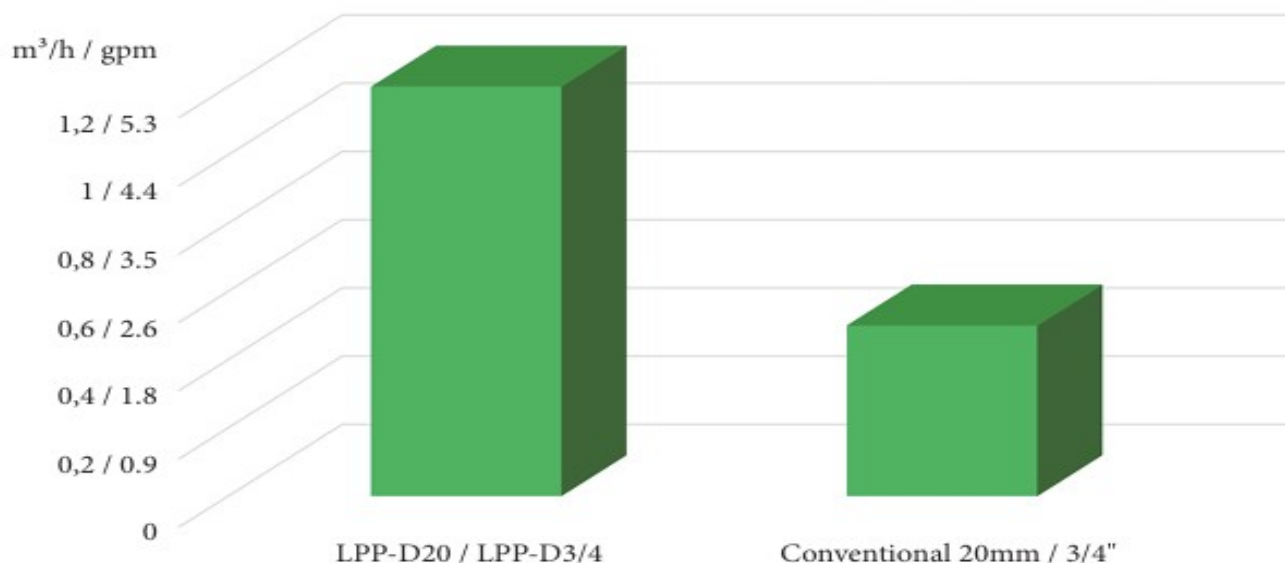


Image: Flowrox hose pump technology vs. conventional technology

Dimensions, LPP-D pumps

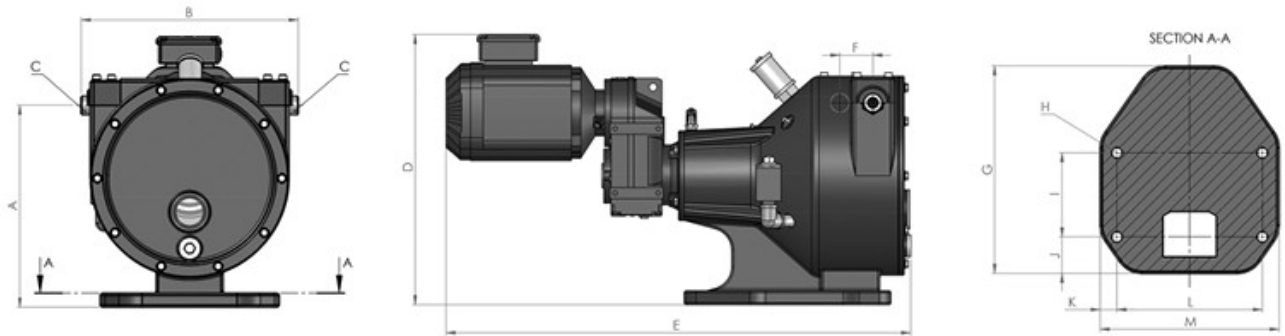

Pump model	A	B	C	D	E	F	G	H	I	J	K	L	M
LPP-D 25 / LPP-D 1" (GM: SEW FAF37, 1,5kW)	360 mm (14.17")	388 mm (15.28")	G 1"	482 mm (18.98")	831 mm (32.7")	59 mm (2.32")	370 mm (14.57")	4x19 mm (0.75")	150 mm (5.91")	65 mm (2.56")	30 mm (1.18")	260 mm (10.24")	320 mm (12.6")
LPP-D 20 / LPP-D 3/4" (GM: SEW FF27, 1,1kW)	285 mm (11.22")	325 mm (12.8")	G 3/4"	414 mm (16.31")	853 mm (33.58")	50 mm (1.97")	320 mm (12.58")	4x19 mm (0.75")	85 mm (3.35")	65 mm (2.56")	26 mm (1")	240 mm (9.45")	291 mm (11.46")
LPP-D 15 / LPP-D 1/2" (GM: SEW FF27, 1,1kW)	285 mm (11.22")	325 mm (12.8")	G 1/2"	414 mm (16.31")	853 mm (33.58")	50 mm (1.97")	320 mm (12.58")	4x19 mm (0.75")	85 mm (3.35")	65 mm (2.56")	26 mm (1")	240 mm (9.45")	291 mm (11.46")

Dimensions with the largest available motor size

Pump model selection guide

Dosing pumps LPP-D

1.	2.	3.	4.	5.	6.	7.	8.	9.
LPP-D	20	GM	7.5	G3/4	3	N	DR	NR

1.	TYPE
LPP-D	Dosing

2.	SIZE (DN)
15	15 mm / 1/2"
20	20 mm / 3/4"
25	25 mm / 1"

3.	MOTORIZATION
GM	Gear motor
GU	Gear unit
BS	Bare shaft

4.	PRESSURE CLASS
7.5	7,5 bar / 108 psi
16	16 bar / 232 psi

5.	CONNECTIONS
G1/2	G1/2" male threads
G3/4	G3/4" male threads
G1	G1" male threads

6.	BODY MATERIAL
3	Aluminium

7.	INVERTER
N	None
II	Wire connected IP55

8.	AUXILIARIES
D	Hose leak detector
R	Revolution detector
F	Forced cooling fan
T	Pressure transmitter with display
X	Special

9.	HOSE
EPDM	Ethylene propylene diene rubber
NR	Natural rubber
NBR	Nitrile rubber
NBRF	Nitrile rubber (FDA)